


# H<sub>2</sub>O COIL

01.01.2009

## ASL Series Electric Duct Heaters

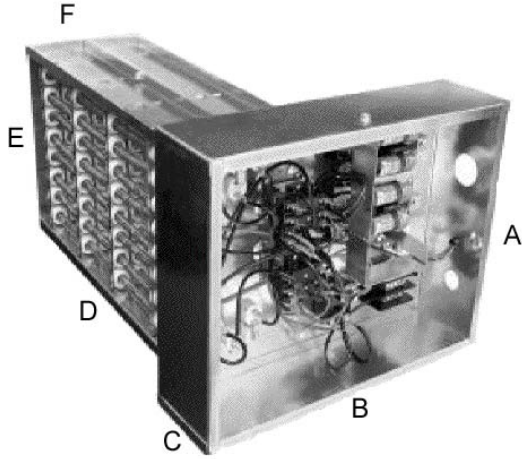

**STOCKLINE** electric duct heaters are UL listed and meet NEC requirements. Most units have multivoltage ratings, high grade nickel chrome elements, galvanized steel control panel & frame and an exclusive element support system. Built in components include primary and secondary limit protection, magnetic contactors (24 volt control), a fan relay and circuit fusing where required by UL and NEC.

*Slip it right in!!!*

Stock line units are designed to operate in a variety of duct sizes. Units meet most residential and light commercial requirements for use with forced air systems. They may be used as a primary source of heat or as a supplementary source or as stand by heat (to heat pump, gas or oil fired systems).

Call or fax for same or next day UPS shipment

Custom sizes also available for 1 week shipment

Part #	Electrical Ratings				Minimum / Maximum		Heater Dimensions (inches)					
	KW @ Voltage	Phase	Steps	Amps	Duct Width	Duct Height	A	B	C	D	E	F
ASL-5A	4.8 KW @ 240 V 4.4 KW @ 230 V 4.0 KW @ 220 V	1	1	20.0 19.1 18.3	8" / 16"	8" / 12"	9	9	4	7.5	7.25	6
ASL-10A	9.6 KW @ 240 V 8.8 KW @ 230 V 8.0 KW @ 220 V	1	1	40.0 38.2 36.6	12" / 20"	8" / 14"	9	9	4	11.5	7.25	6
ASL-15A	14.4 KW @ 240 V 13.2 KW @ 230 V 12.0 KW @ 220 V	1	2	60.0 57.5 55.0	18" / 24"	8" / 12"	9.5	15	4	17.5	7.25	6
ASL-20A	19.2 KW @ 240 V 17.6 KW @ 230 V 16.1 KW @ 220 V	1	2	80.0 76.6 73.3	16" / 22"	10" / 14"	11	15	4	15.5	9.25	6
ASL-10T	9.9 KW @ 240 V 9.0 KW @ 230 V 8.3 KW @ 220 V	3	1	23.9 22.7 21.9	12" / 20"	8" / 14"	9	9	4	11.5	7.25	6
ASL-15T	15.0 KW @ 240 V 13.6 KW @ 230 V 12.6 KW @ 220 V	3	2	36.0 34.0 33.0	15" / 22"	10" / 14"	11	10	4	14.5	9.25	6
ASL-20T	19.8 KW @ 240 V 18.0 KW @ 230 V 16.6 KW @ 220 V	3	2	47.7 45.3 43.7	16" / 22"	11" / 14"	12	9	4	15.5	9.25	6
ASL-APS	Air Pressure Switch											
ASL-TRK	Transformer Kit											