


H₂O COIL

01.22.2009

ATS Series Flanged Duct Mount Standard Steam Coils

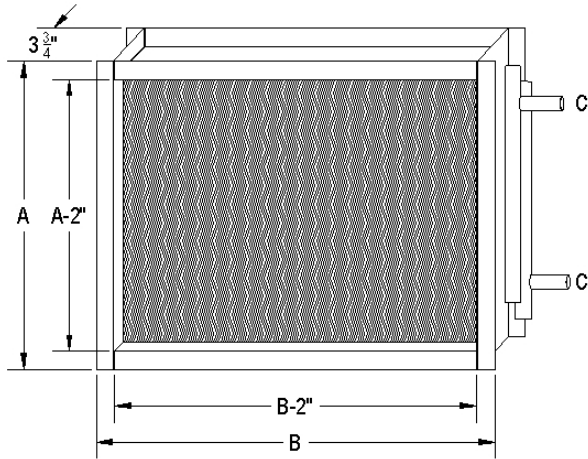

- ARI 410 Certified
- Galvanized Steel 18GA frame
- Aluminum Fins, .0045 thickness
- Copper Tubing, 1/2" w/ .025 wall
- BTU outputs from 70,000 to 347,000
- Horizontal/Vertical Installation
- Full one year warranty

Part #	*lbs	CFM	BTUH	APD	A	B	C
ATS1-1224	5	2000	70,000	0.26	14.5	26	1 1/8
	10		75,200				
	15		79,200				
ATS1-1230	5	2400	85,900	0.24	14.5	32	1 1/8
	10		92,300				
	15		97,800				
ATS1-1236	5	3000	105,000	0.26	14.5	38	1 1/8
	10		112,800				
	15		119,600				
ATS1-1524	5	2300	82,400	0.24	17	26	1 1/8
	10		88,600				
	15		93,900				
ATS1-1530	5	2800	101,800	0.23	17	32	1 1/8
	10		109,400				
	15		116,000				
ATS1-1536	5	3400	122,800	0.23	17	38	1 1/8
	10		132,000				
	15		139,900				
ATS1-1724	5	2700	96,400	0.24	19.5	26	1 1/8
	10		103,600				
	15		109,800				
ATS1-1736	5	4000	143,800	0.24	19.5	38	1 1/8
	10		154,600				
	15		163,800				
ATS1-2530	5	5000	175,000	0.26	27	32	1 1/8
	10		188,100				
	15		199,300				
ATS1-2536	5	6000	210,000	0.26	27	38	1 1/8
	10		225,700				
	15		239,200				

*Pressure in pounds

Part #	*lbs	CFM	BTUH	APD	A	B	C
ATS2-1224	5	1250	98,100	0.23	14.5	26	1 1/8
	10		105,500				
	15		111,700				
ATS2-1230	5	1650	126,400	0.25	14.5	32	1 1/8
	10		136,900				
	15		144,000				
ATS2-1236	5	2000	152,600	0.26	14.5	38	1 1/8
	10		164,000				
	15		173,800				
ATS2-1524	5	1600	122,000	0.26	17	26	1 1/8
	10		131,200				
	15		139,000				
ATS2-1530	5	2000	152,600	0.26	17	32	1 1/8
	10		164,000				
	15		173,800				
ATS2-1536	5	2400	183,100	0.26	17	38	1 1/8
	10		196,800				
	15		208,500				
ATS2-1724	5	1800	139,500	0.24	19.5	26	1 1/8
	10		150,000				
	15		158,900				
ATS2-1736	5	2800	213,600	0.26	19.5	38	1 1/8
	10		229,600				
	15		243,300				
ATS2-2530	5	3000	250,800	0.25	27	32	1 1/8
	10		269,600				
	15		285,600				
ATS2-2536	5	4000	305,200	0.26	27	38	1 1/8
	10		328,100				
	15		347,600				

Performance data based on 65° EAT