
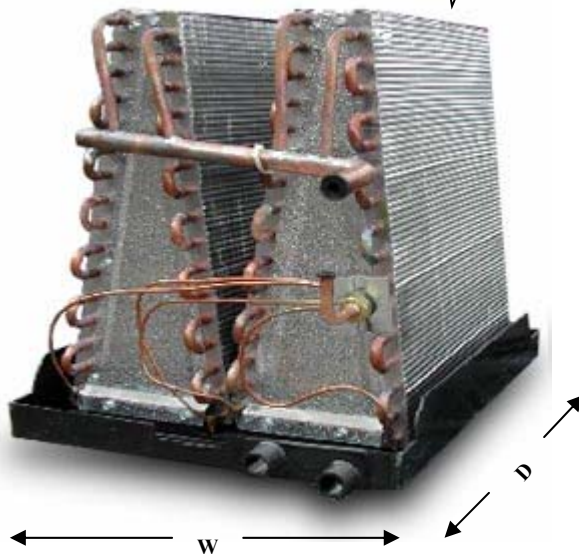


H₂O COIL

ASUC **ALLSTYLE** LOW-PROFILE UP-FLOW UNCASSED 'M' COILS

In Stock!



Standard Features:

- Heavy rifled copper tubing
- Aluminum fins
- Heavy aluminum end plates
- Dual rated for R-22 and R-410a
- Pressure tested to 450 lbs.
- Polymer drain pan
- Pitched drain pan with heat shield
- Metering device is accessible from plenum exterior

3/4" MPT primary & secondary drain connections

3/8" liquid line connection

Refrigerant suction line connections:
 2.5 to 3.0 ton 3/4"
 3.5 to 5.0 ton 7/8"

UNCASSED 'M' COIL DIMENSIONS				
	Coil	Uncased Depth	Uncased Width	Uncased Height
2.5*-3.0 ton	ASUC36-M15	19.5	15	11.5
3.5**-4.0 ton	ASUC48-M20	19.5	20	11.5
5.0 ton	ASUC60-M24	19.5	24	11.5

*- for a 2.5 ton application a 067 piston must be ordered and swapped in (sold separately)
 **-for a 3.5 ton application a 074 piston must be ordered and swapped in (sold separately)

ADD-ONS	
H-RP31072	R-22 NON BLEED EXPANSION VALVE 2.5 - 3 TON
H-RP31073	R-22 NON BLEED EXPANSION VALVE 3.5 - 4 TON
H-RP31074	R-22 NON BLEED EXPANSION VALVE 5 TON
H-RP31094	R410A NON BLEED EXPANSION VALVE 2.5 - 3 TON
H-RP31099	R410A NON BLEED EXPANSION VALVE 3.5 - 5 TON

H₂O COIL INC.

3514 HARGALE RD. OCEANSIDE, NY 11572 TEL: (516) 256-3131 FAX: (516) 599-2000